




Agglomerate of polyurethane foam Elastic underlay for wooden sport floorings

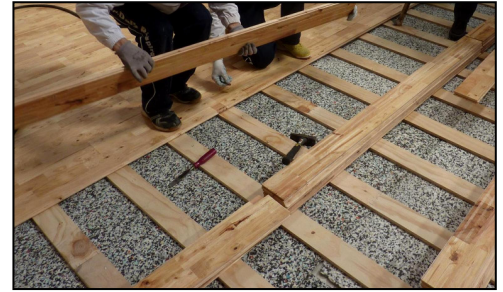

Composition

Agglomerate of polyurethane foam

Utilization

Elastic underlay for wooden sport flooring

Laying

Free laying

Technical details

<i>Format</i>	sheets
<i>Dimensions</i>	m. 2 x 1
<i>Density</i>	from 60 a 200 kg./mc. on customer request
<i>Thickness</i>	starting from mm. 4 on customer request
<i>Features</i>	it maintains thickness and elasticity over time Ecologic TUV certification about absence of toxic substances

Product for professional installers, quotes on request specifying density and thickness